

CBBS-3876 Assembly Instructions





WARNING



To help prevent serious or fatal injuries from entrapment or falls:

- Never allow a child under 6 years on upper bunk
- Use only a mattress that is 76 inches long and 38 inches wide on upper bunk
- Ensure thickness of mattress and foundation combined does not exceed 6 inches in height and that the mattress surface is at least 5 inches below upper guardrails


DO NOT REMOVE THIS LABEL

Instruction Manual

PLEASE READ BEFORE ASSEMBLY OF BUNK BED

- PLEASE FOLLOW ALL INFORMATION LISTED ON WARNING LABELS FOUND ON THE BUNK BED
 AND ALL PACKAGING. DO NOT REMOVE ANY AND ALL WARNING LABELS FROM THE BED
- DO NOT ALLOW CHILDREN UNDER 6 YEARS OF AGE TO USE UPPER BUNK BED
- DO NOT ALLOW HORSEPLAY ON OR UNDER THE BED
- USE ONLY A MATTRESS WITH THE DIMENSIONS 76" L X 38" W X 6" H ON THE UPPER BUNK.
- THE SURFACE OF THE MATTRESS MUST BE AT LEAST 5 INCHES BELOW THE UPPER EDGE OF THE GUARDRAILS. MATTRESS CANNOT EXCEED THESE DIMENSIONS FOR ANY REASON.
- USE OF WATER OR SLEEP FLOTATION MATTRESS IS PROHIBITED FOR ANY SLEEPING SURFACE
- DO NOT SUBSTITUTE PARTS SUPPLIED WITH THE BED. REPLACEMENT PARTS CAN BE SUP-PLIED BY CONTACTING US AT 800.969.4100
- USE OF GUARDRAILS ON UPPER BUNK IS REQUIRED AT ALL TIMES. IF THE BUNK BED IS
 PLACED NEXT TO A WALL, THE FULL LENGTH GUARDRAIL SHALL BE PLACED AGAINST THE
 WALL TO PREVENT ENTRAPMENT BETWEEN BED AND WALL
- PERIODIC INSPECTION OF GUARDRAILS, LADDERS AND OTHER COMPONENTS IS REQUIRED
 BY END USER TO CONFIRM THEY ARE IN PROPER LOCATION, FREE FROM DAMAGE AND THAT
 ALL CONNECTORS ARE TIGHTLY SECURED.
- ALWAYS USE LADDER TO ACCESS THE UPPER BUNK.
- NEVER ATTACH OR HANG ITEMS TO ANY PART OF THE BED THAT ARE NOT DESIGNED TO BE
 USED WITH THE BED.
- KEEP INSTRUCTIONS/WARNINGS FOR FUTURE REFERENCE
- 2 PERSON ASSEMBLY REQUIRED



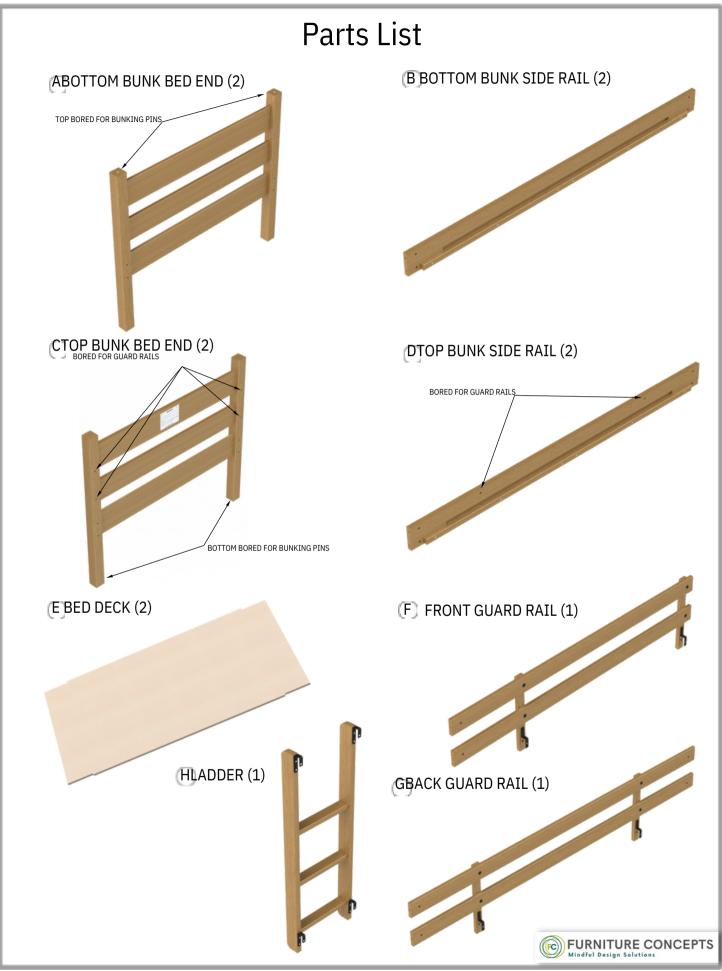

Hardware List

H1 - Bolt Connector 120mm (22)

H2 - Bunking Pin (4)

H3 - Bolt Connector 40mm (4)

H4 - Flat Head Screw #8 x 1 3/4 (16)

H5 - Truss Head Screw #10 x 1 (2)

H6 - Cross Dowel (22)



Tools Required

T1 - Phillips Head Driver

T2 - 4mm Hex Head Driver or Allen Key

T3 - Flat Head Screw driver

T4 - Tape measure


***Note: 2 PERSON REQUIREMENT FOR ASSEMBLY ***

Before Assembly

Determine left or right ladder position before assembly. Refer to instructions for guard rail reversal on page 8 if necessary.




Bottom Deck Assembly ***2 PERSON ASSEMBLY



Assemble bed deck and side rails. Make sure both rails match, and do not have holes for guard rails.


Offset deck 1/2" inch from end of rails. Secure at least one rail with screws.



Bottom Bunk Assembly
2 PERSON ASSEMBLY

Make sure side rails with no guard rail holes are paired with bed ends with no guard rail holes and have bunking holes in tops of posts.

Secure deck and rails to bed ends with 120mm bolts and cross dowels.

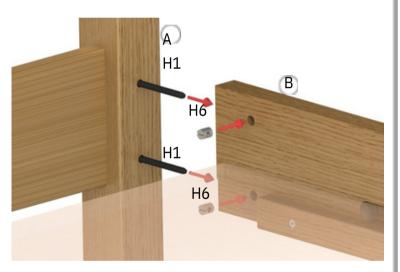

WARNING STICKERS ON BED ENDS MUST FACE INWARD **H4**


Bottom bed should have bunking holes on top and no guard rail holes in posts or side rails.

Secure remaining side rail to deck with screws if not done in step 1.



Top Bunk Assembly
2 PERSON ASSEMBLY




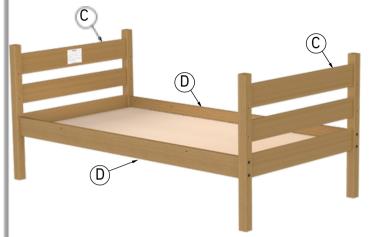


Repeat steps 1 thru 3 using side rails and bed ends bored for guard rails.

Guard Rail Installation

Place front and back guard rails onto bored side rails of top bunk.

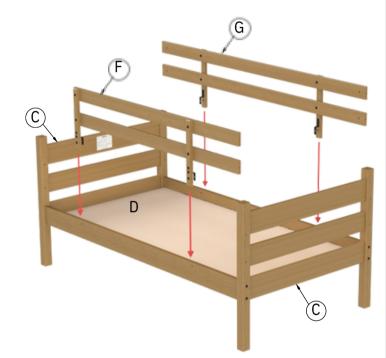

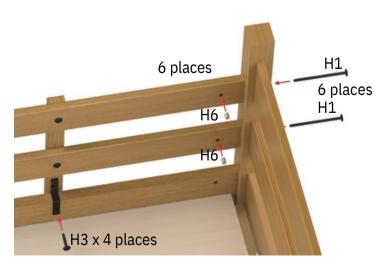

Secure guard rails to bed end posts with 120mm bolts and cross dowels, and into side rails with 40mm bolt connectors.



Bed Bunking
2 PERSON ASSEMBLY

Place bunking pins into the tops of all 4 posts of bottom bed.

Lift top bunk and place onto bottom bunk, inserting pins into the bottoms of the posts of the top bunk.

Ladder placement

Place ladder into opening making sure hooks slide down over side rails of top and bottom bunk




H5

Ladder Attachment

Attach into ladder screw hook and side rail of top bunk, using hook closest to guard rail.




Ladder Attachment

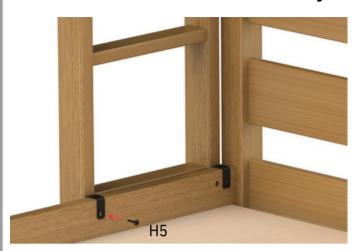

Attach screw into ladder hook and side rail of bottom bunk, using hook farthest from bed end post.

OPTION — Left/Right Front Guard Rail Reversal

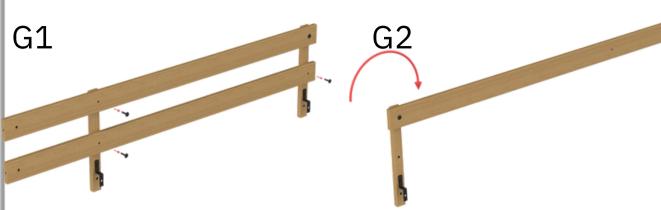

Remove 3 bolts shown, loosen remaining bolt

Swing upper rail to opposite side of upright rail



Insert bolt into upper rail as shown. Do not fully tighten.



Insert bolts into lower rail as shown. Do not fully tighten.

G5

Attach guard rail to top bunk as shown in steps 5 & 6. **Tighten bolts loosened during guard rail**

